

Honeywell




Blenze plus



Blenze plus

India's First Anti-Bacterial Flat Switch



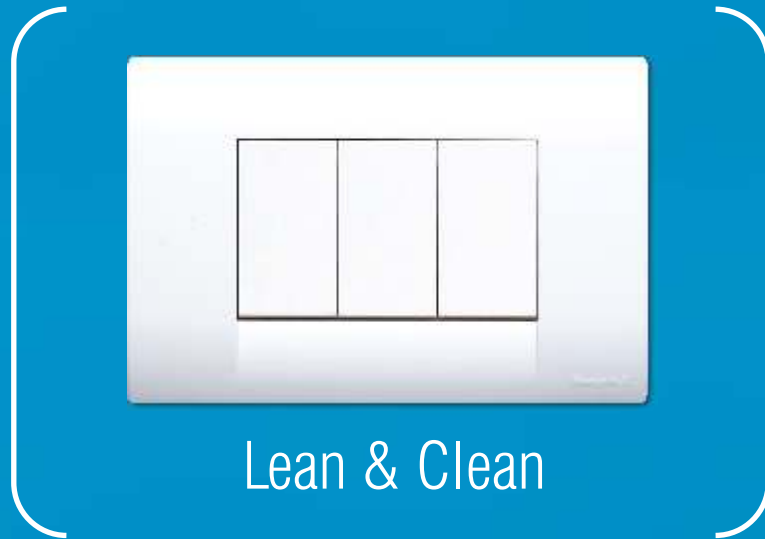

Blenze plus



India's First Anti-Bacterial Flat Switch

Anti-Bacterial technology: **99% Bacteria control**

Switches, Sockets & Front Plates

Contents

Switches	4	Technology Modules	7
Sockets	5	Hospitality Range	9
Dimmers, Regulators and Volume Controls	6	Front Plates	10
Communication Range			

Blenze plus

India's First Anti-Bacterial Flat Switch


Blenze plus introduces a range of wiring accessories (switches, sockets & front plates), which offer protection against microbial contamination/ infection, using new generation anti-bacterial technology. Hygiene and Infection control is now becoming increasingly important in environments like hospitals, and homes. Anti-microbial coating impregnated with silver ions inhibits microbial growth to improve hygiene. The active ingredients, silver ions, used in Blenze plus products are incorporated during the manufacturing process and are therefore active for the entire life of the product.

+ Anti-Bacterial Technology

This active ingredient inhibits the growth of broad spectrum bacteria and fungi such as E-coli, Staphylococcus aureus, Listeria and Salmonella.

Bacti-safe is a new generation antibacterial technology with advanced features:

- 99% reduction in bacteria (Ecoli & Staphylococcus aureus) on the surface Healthy environment
- Non toxic and safe for humans
- Permanent coating equal to product life Durability and Value for money
- Material: Silver Ion (anti-bac coating) with Poly carbonate Aesthetically pleasing and Fire retardant

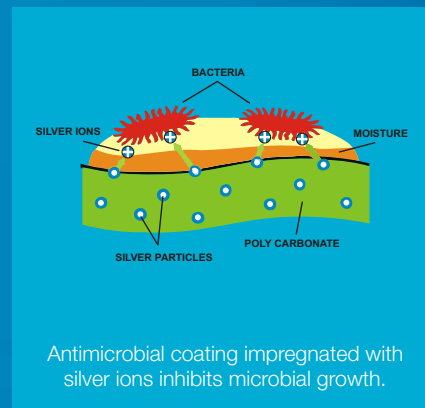

+ Flat Modular Switches

+ Front Loading & Removal, Universal Adaptability

+ Sturdy Muscular Construction

+ Technology Modules

+ Single Window Aperture

+ Anti Single Pin Entry Shutters

+ Precise Alignment


+ Secure Socket Engagement

+ RoHS Compliant

+ Anti-Pull Snap

+ Silky-Satin Matte Finish

+ Easy to Install

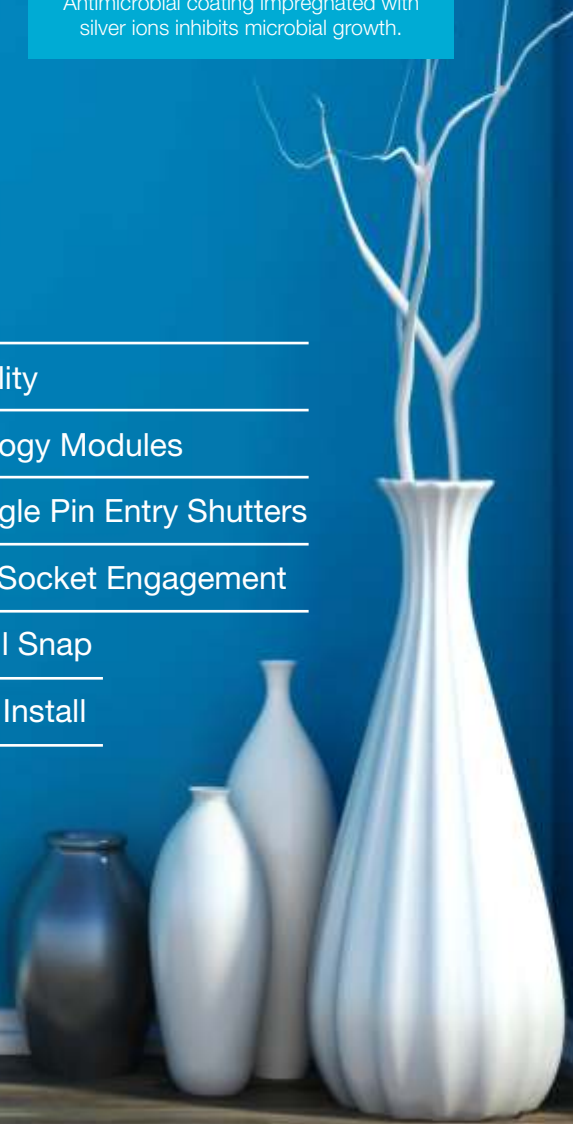

Switches

Antibacterial

The Blenze plus switches are completely flush with the front plate in 'off' condition making them appear flat on the wall. They have a shroudless rocker with positive action. The range is future proofed 10AX and is IP 20 rated, making it truly a next generation switch range. These switches have V-shaped angled terminals with backed out and captive screws. The switches are designed with RH base for easy installation. Blenze Plus range of switches are engineered with ant ingress design which give complete protection from ant entry. The 32A DP switch is definitely the 'best in class'. It can carry heavy resistive & inductive loads up to 7.68 kW. Also, in the switch, the lenses are textured for better visibility of indicators. All this and more reaffirm Honeywell's leadership in switch technology.



DW501WHI
6 AX One Way Switch



DW502WHI
6 AX Two Way Switch



DW403WHI
10 AX One Way Switch with Indicator



DW405WHI
10 AX Bell Push Switch



DW504WHI
2M Bell Push Switch



DW413WHI
16 AX One Way Switch with Indicator

Elec. Spec. : Rated Voltage - 230V, Rated Current - 6AX, 10AX & 16AX, Nature of Supply - AC only, Terminal Capacity - 4 Sq.mm

Features : ♦ Flushes with the front plate in OFF condition ♦ Future proofed - 10 AX ♦ Shroudless designed rocker with positive action ♦ Two way switch with pad printing for visual differentiation ♦ Ant - Ingress Rocker ♦ Captive and backed out screws for faster installation ♦ LED based indicator for longevity ♦ Textured lens for better visibility ♦ Heavy and sturdy terminals for more effective terminations ♦ Complies to IS 3854:1997 ♦ Fully RoHS compliant product

Finish : Silky Satin Matte

Dimension : H - 45 mm, W - 25 mm - 1M, H - 45 mm, W - 50 mm - 2M

Colours : Satin White / Charcoal Black

32A DOUBLE POLE

Antibacterial



DW224WHI
32A DP Switch

Module : 2M

Elec. Spec. : Rated Voltage - 230V, Rated Current - 32A, Nature of Supply - AC only, Terminal Capacity - 2.5 Sq.mm

Features : ♦ The best in its class ♦ Capable of carrying heavy Resistive & Inductive Loads with a maximum load of 7.86kW ♦ Isolates phase & neutral whenever the load is cut-off from the mains ♦ Complies to IS 3854:1997 ♦ Fully RoHS compliant product

Dimension : H - 45 mm, W - 50 mm

Colours : Satin White / Charcoal Black

Finish : Silky Satin Matte

MINITRIP



DW227WHI
25A Minitrip Switch

Module : 1M

Elec. Spec. : Rated Voltage - 240V, Rated Current - 16A / 25A, C type, No. of poles - Single Pole, Min. Voltage - 50V, Rated short circuit capacity - 1cn = 3KA

Function : Suitable for switching on 16A & 25A rated appliances

Colours : Satin White / Charcoal Black

Finish : Silky Satin Matte

Application : For domestic, agricultural and industrial applications

MOTOR STARTER



DW217WHI
25A AC Motor Starter

Module : 2M

Elec. Spec. : Rated Voltage 230 V; Rated Current - 16-25A, Nature of Supply - 50 Hz AC Only, Terminal Capacities 6 Sq.mm

Features : ♦ Technical and constructional features confirming to IS 13947-4 ♦ Thermal trip overload protection

Dimension : H-45mm, W-50mm, D-44.10mm

Colours : Satin White / Charcoal Black

Finish : Silky Satin Matte

Sockets

Antibacterial

Blenze plus sockets are engineered to ensure easy and absolute engagement to plug top. They have an enhanced safety feature of a smart anti single pin entry shutter. All sockets are rated to minimum 10A for future-proofing. The shutter design ensures that the Earth pin of the plug is engaged first before Line and Neutral pins in case of 3pin plug. All contact points are made of Phosphor Bronze material that is corrosion resistant ensuring long term reliability and avoids loss of electrical energy. All sockets are available in 2 modules.



DW420WHI
10A 2/3 Pin Universal Socket

Module : 2M
 Elec. Spec. : Rated Voltage - 250V, Rated Current - 10A, Nature of Supply - AC only, Terminal Capacity - 1.5 Sq.mm
 Features : ♦ 10A 2/3 pin shutter socket is India's first fully compatible socket for both 4mm and 5mm dia pins ♦ 3 pin socket can take mobile charger too ♦ Safety shutters ♦ Contact terminals - Phosphor Bronze ♦ Designed to the requirements of IS 1293:2005 ♦ Fully RoHS compliant product
 Dimension : H - 45 mm, W - 50 mm
 Colours : Satin White / Charcoal Black



DW426WHI
6/10/13A International Socket

Module : 2M
 Elec. Spec. : Rated Voltage - 250V, Rated Current - 6/10/13A, Nature of Supply - AC only, Terminal Capacity - 2.5 Sq.mm
 Features : ♦ Patented drop down safety shutters in international socket makes it probably the safest in its class which refuses single pin access to line and neutral contacts ♦ Truly international; compatible to plug tops of over 17 countries ♦ Inbuilt safety shutters ♦ Contact terminals - Phosphor Bronze ♦ Fully RoHS compliant product
 Dimension : H - 45 mm, W - 50 mm
 Colours : Satin White / Charcoal Black



DW428WHI
10/25A Socket

Module : 2M
 Elec. Spec. : Rated Voltage - 230V, Rated Current - 10/25A, Nature of Supply - AC only, Terminal capacity - 4 Sq.mm
 Features : ♦ Ensures a perfect fit with any 3 pin plug tops ♦ Inbuilt safety shutters ♦ Contact terminals - Brass ♦ Designed to the requirements of IS 1293:2005 ♦ Fully RoHS compliant product
 Dimension : H - 45 mm, W - 50 mm
 Colours : Satin White / Charcoal Black



DW427BLK
One Module 2 Pin Charger Socket

Module : 1M
 Elec. Spec. : Rated Voltage - 250V, Rated Current - 16A, Nature of Supply - AC only, Terminal capacity - 2.5 Sq.mm
 Features : ♦ Suitable for flat pin plug and 4/5 mm dia 2 pin plug tops ♦ Optimum space utilisation ♦ Inbuilt safety shutters ♦ Contact terminals - Phosphor Bronze ♦ Fully RoHS compliant product
 Dimension : H - 45 mm, W - 25 mm
 Colours : Satin White / Charcoal Black

Features

- ♦ Two plate system
- ♦ Grids with muscular design
- ♦ Reinforced cross sectional stress design aligns with scientifically placed ribs
- ♦ Precision engineered locks in Front Plates ensure proper alignment
- ♦ Higher module grids are metal reinforced to prevent buckling
- ♦ 15° leverage angle for easy removal
- ♦ Front plate with a break-off pad for screw retention
- ♦ Even on an uneven wall surface, where the grid is put on extreme stress conditions, the front plates with APS (Anti-Pull Snap feature) stay engaged
- ♦ Single window aperture eliminates dust accumulation on front plates
- ♦ Break-off pads to hold the screws
- ♦ Modules of 1,2,3,4,6,8, 8 Square, 9, 12 and 18 are available in Black & White colours

FRONT PLATE SELECTION CHART

MODULE		1M	2M	3M	4M	6M	8M	8M Square	9M	12M	18M
Dimensions (mm)	W X H	97 x 88	107 x 88	132 x 88	157 x 88	222 x 88	257 x 88	157 x 153	281 x 88	222 x 153	219 x 215
	Fixing Centre	62	62	88	120	196	213	H-120,V-60	H-158,V-67	H-196,V-65	H-194,V-136
White		DW101WHI	DW102WHI	DW103WHI	DW104WHI	DW106WHI	DW108WHI	DW108VWHI	DW109WHI	DW112WHI	DW118WHI
Charcoal Black		DW101BLK	DW102BLK	DW103BLK	DW104BLK	DW106BLK	DW108BLK	DW108VBLK	DW109BLK	DW112BLK	DW118BLK

Dimmers and Regulators

Blenze plus dimmers have a push on/off knob, for convenience of switching at any dimming-level and a full 400W power handling capability. Blenze plus regulators have standard five definite speeds and 'off'. The regulator has a unique knob with a unique TM SPEED-VIEW . Also, it is completely hum-free, irrespective of the speed. Blenze plus volume control comes in 2M size.

REGULATOR



DW472WHI
Step Fan Speed Control 120W

- Module : 2M
- Elec. Spec. : Rated - 100 Ohms 3W LIN w/w, Amplifier audio input (max) - 17V - RMS (35W RMS in 8 Ohms), Terminal capacities - flexible leads with connectors
- Features : ♦ Five definite speeds + OFF ♦ Unique knob with SPEED - VIEW™ ♦ Completely hum-free irrespective of speed ♦ Uniform speed increments across steps ♦ Ease of installation with pre-marked screw-connector ♦ Fully RoHS compliant product
- Dimension : H - 45 mm, W - 50 mm
- Colours : Satin White / Charcoal Black

DIMMER



DW480WHI
Push ON/OFF 400 W Dimmer

- Module : 2M
- Elec. Spec. : Rated Voltage - 230V, Rated Power - 400W, Nature of Supply - AC only, Type of load - Incandescent lamp only, Terminal capacity - 2.5 Sq.mm on pre marked screw-connector
- Features : ♦ Push ON/OFF knob ♦ Convenience of switching at any dimming-level ♦ Ease of installation with pre-marked screw-connector ♦ Full 400W power handling capability ♦ Linear brightness control ♦ Fully RoHS compliant product
- Dimension : H - 45 mm, W - 50 mm
- Colours : Satin White / Charcoal Black

Communication Range

Blenze plus communication range consists of TV coaxial, Computer jack, AV socket, Telephone jack and USB charger. The entire range is designed for maximum data & voice transfer efficiency. Features in the range like angled connectors in TV coaxial, tool free connectors in computer jack and sliding shutters in telephone jack are designed to deliver minimal signal loss, ease of installation and low maintenance.

TELEPHONE JACK



DW492WHI
Two Line RJ 11

- Module : 1M
- Elec. Spec. : No of contacts - 4, Category - 3, Voltage - 33V r.m.s / 70V DC, Speed of transmission - 16 MHz 100 Ohms UTP cable size, Rate of transmission - 10 Mbps, Compliance of standards - FCC Part 68, ANSI/EIA/TIA-568 TIA TSB - 36, TIA TSB-40, Attenuation - 0.4db
- Features : ♦ 2 Lines can be connected simultaneously ♦ Anti-spread (Strands) Screw terminals for easy installation ♦ Spring loaded sliding shutter that protect from dust ♦ 50µ" Gold plated leads for better data transfer efficiency ♦ Fully RoHS compliant product
- Dimension : H - 45 mm, W - 25 mm
- Colours : Satin White / Charcoal Black

COMPUTER JACK



DW493WHI
CAT 6 RJ 45

- Module : 1M
- Elec. Spec. : No of contacts - 8, Category - Cat 6, Speed of transmission - 250 MHz 100 Ohms UTP cable size, Rate of transmission - 1 GB/sec, Compliance of standards - FCC Part 68, Insulation resistance - >500 M Ohms, Current rating - 150 VAC, 2 A, Dielectric withstand voltage - 1000V, 60 Hz/1min, Contact resistance - <20 million Ohm, DC Resistance - 0.1 Ohm
- Features : ♦ CAT 6 compliant Rj45 ♦ Spring loaded sliding shutter that protects from dust ♦ Underwriters Laboratories (UL) approved ♦ Tool free connecting terminals ♦ 50µ" Gold plated leads for better data transfer efficiency ♦ Fully RoHS compliant product
- Dimension : H - 45 mm, W - 25 mm
- Colours : Satin White / Charcoal Black

USB Charger



DW583WHI
USB Charger

- Module : 1M
- Features : ♦ Inbuilt surge protection ♦ Short circuit protection available in output ♦ Snapfit modular design
- Application : Charging devices with a USB connection like smart phones, touch screen tablets, games consoles, MP3 players, E-book readers, Cameras, Navigation devices, etc.

Specification Details

- Input Voltage : 90V to 270V
- Frequency : 50Hz
- Input Power : 300mW [With No Load]
- Output Voltage : 4.75V [Without Load] to 5.16V [Full Load]
- Output Current : 0 - 1 Amp
- Output Power : 0 - 5 Watt
- Output Over Current Protection : 1 – 1.2 Amp
- Output Rise Time with Load : 76mS @210V

TV SOCKET



DW451BLK
TV Socket

- Module : 1M
- Features : ♦ Angled connector holding ♦ Silver plated for minimal signal loss ♦ Screw terminals for easy installation ♦ Fully RoHS compliant product
- Dimension : H - 45 mm, W - 25 mm
- Colours : Satin White / Charcoal Black

Technology Modules

Blenze plus Technology range comes with smart products like timer switch, foot lamp and remote switch. This brilliant range comes with futuristic features delivering ease of use, user convenience, safety and customised solutions. Blenze plus brings in the best of technology in these products to offer a truly safe experience.

TIMER SWITCH



DW219BLK
Timer Switch

Module	: 3M
Elec. Spec.	: Rated Current: 6A Resistive, 1A Inductive, Rated Voltage: 170 - 250V, 60hz, Nature of Supply - AC only, Battery - 1.5V DC NiMH with 100hrs backup
Features	: ♦ Automatic ON/OFF control based on preset timings ♦ 24hrs x 7 days programmable timer ♦ Repeatable 8 programmable channels ♦ Adjustable ON/OFF delay control from minute to day ♦ 15 user friendly DAY settings ♦ Single push TRI-STATE operation (ON-OFF-AUTO) ♦ LCD indicator of ON/OFF delay for switching ♦ Retains status during power loss ♦ Recessed RESET to avoid accidental usage ♦ Fully RoHS compliant product
Dimension	: H - 45 mm, W - 75 mm
Colours	: Satin White / Charcoal Black

DOWN LIGHT / FOOT LAMP



DW530WHI
Down Light

Module	: 2M
Elec. Spec.	: Rated Voltage - 230V, Nature of Supply - AC only, Terminal capacities - 2.5 Sq.mm
Features	: ♦ Long life white colour LED based illumination ♦ Maintenance free LED lamps, which never need to be changed ♦ Power consumption less than 1W ♦ Textured lens for uniform dispersion of light ♦ Operates even at low voltages ♦ Easy installation with screw terminations ♦ Fully RoHS compliant product
Dimension	: H - 45 mm, W - 50 mm
Colours	: Satin White / Charcoal Black

REMOTE SWITCH



DW606WHI
Remote Switch

Module	: 4M (Mono block)
Elec. Spec.	: Rated Current : Switch - 5A Resistive/ 2.5A Inductive per switch, Fan - 100W(max) Rated Voltage: 140- 320V, Number of Channels: 4 Nature of Supply - AC only, Remote control: Infrared (line of sight), Remote range: 30 feet @ operating angle 120° Remote Battery: CR2025, Operating temperature: 0-55°C
Features	: ♦ Operates from wall-unit and with a full-functional remote handset ♦ Built-in memory retains last status of load in case of power failure or when switched ON ♦ Sensitive infrared remote control operates from 30 feet distance ♦ Press S1/S2/S3 to turn individual loads ON/OFF, corresponding keys will glow when they are ON ♦ Press '⊗' to ON/OFF the fan, use '▲,▼' to increase and decrease the fan speed ♦ Pressing S1/S2/S3 for more than 2 sec will turn OFF the entire system (wall unit) ♦ Avoid using more than one remote in same room, if unavoidable, keep a distance of 10 feet and in the same line of the remote handset ♦ Fully RoHS compliant product
Colours	: Satin White

ASSEMBLED IT MODULE



DW109WHI-A



DW109WHI-B

Module	: 9M
Features	: ♦ Front Plate with Satin finish blends with all kinds of interiors echoing latest trends ♦ Screw retention pads ♦ Angular clearance built into design to facilitate easy removal of Snap On ♦ Snap On facilitates protection against paint spills and other installation related abuses ♦ Multi-directional flexible alignment in the grid covers for shortcomings in box installations ♦ Structurally stable fixing screw feature in the grid ♦ Resistant to ageing and to humidity ♦ Resistant to heat
Dimension	: L x B x D : 281.70 mm x 88 mm x 31.2 mm
DW 109 WHI - A	: 9M front plate assembled with 4 nos. of 10 Amps socket and 1 no. of 16 Amps indicator switch of the Blenze plus range of products
DW 109 WHI - B	: 9M front plate assembled with 4 nos. of international socket and 1 no. of 16 Amps indicator switch of the Blenze plus range of products
Application	: Houses, Hotels, Offices, Hospitals and Similar installations



Blenze plus introduces the new electro mechanical hospitality range specially designed for the hotel industry. The range includes energy key tag, DND, MMR, MML with superior aesthetics, indicators and energy saving features which ensure the guest's comfort is not compromised in any way. The range is convenient, safe and efficient.

ENERGY KEY TAG



DW527WHI/BLK
20A Energy Key Switch with
Time Delay

- Module : 3M
- Features : ♦ Modular, 3 module in size, made of engineering plastics ♦ Easy installation/ removal of module due to the snap fit feature ♦ Flat profile similar to existing range ♦ Operating voltage - 170 to 250 volts AC ♦ Load Capacity - 3000W, all types of inductive & resistive loads ♦ Space provided in the key tag for sticking room no ♦ Downward arrow LED in the front plate indicates the insertion of the key tag or power ♦ The time delay will keep the power in the room for 30 secs (±5 sec) even after removal of the key tag.
- Application : To control supply to room(s) and office areas where energy wastage has to be prevented
To prevent the discomfort of the guest being in the darkness after pulling off the key tag
To serve as master control for Electrical appliances of all resistive & inductive loads upto 3000W.
- Dimension : L x B : 74.5X 59.5 mm Depth : 64mm

DND SWITCH



DW414BLK/WHI
2 way Switch DND marked 1M

- Module : 1M
- Features : ♦ Modular (1M) ♦ Laser marking on the switch rocker ♦ LED lamp for use as locator or indicator ♦ LED ensures less consumption of electricity and long life ♦ Rocker shape for more ergonomics, human touch and feel ♦ Easy installation/ removal of module due to the snap fit feature ♦ LED for long life
- Application : Service indication in hotel industry
- Dimension : L x B : 45 x 24.7 mm Depth : 26 mm

Hospitality Range

MAKE MY ROOM / MAKE MY LAUNDRY SWITCH



DW416WHI/BLK /
DW415WHI/BLK
1M MML/MMR Switch

Module : 1M
 Features : ♦ Modular (1M) ♦ Laser marking on the switch rocker ♦ LED lamp for use as locator or indicator ♦ LED ensures less consumption of electricity and long life ♦ Rocker shape for more ergonomics, human touch and feel ♦ Easy installation/ removal of module due to the snap fit feature ♦ LED for long life
 Application : Service indication in hotel industry
 Dimension : L x B : 44.9x 24.7 mm Depth : 26 mm

SERVICE INDICATORS



D901WHI/BLK/
DW902WHI/BLK/
DW903WHI/BLK
1M DND, MMR, MML Indicator

Module : 1M
 Elec. Spec. : Rated - 100 Ohms 3W LIN w/w, Amplifier audio input (max) - 17V - RMS (35W RMS in 8 Ohms) | Terminal capacities - flexible leads with connectors
 Features : ♦ Modular (1M) ♦ Comes in compact single module size ♦ Good visibility of the service ♦ LED for long life
 Application : Service indication in hotel industry
 Dimension : L x B : 44.9x 24.7 mm Depth : 24.4 mm

Metal Box

METAL BOX SELECTION CHART

MODULE		1M	3M	4M	6M	8M	8M Square	9M	12M	18M
Metal Box Dimensions (mm)	W X H X D	73 x 70 x 50	98 x 72 x 51	132x70x51	208 x 70 x 61	228 x 76 x 61	133x133x50	245x77x60	208x139x61	210x211x60
	Fixing Centre	60	88	121	197	H-158, V-67	H-120, V-60	H-158, V-67	H-196, V-65	198
Metal Box Code		GDW26012	GDW26003	GDW26045	GDW26068	GDW260810H	GDW260810V	GDW26009	GDW261216	GDW261824
White		DW101WHI DW102WHI	DW103WHI	DW104WHI	DW106WHI	DW108WHI	DW108VWHI	DW109WHI	DW112WHI	DW118WHI
Charcoal Black		DW101BLK DW102BLK	DW103BLK	DW104BLK	DW106BLK	DW108BLK	DW108VBLK	DW109BLK	DW112BLK	DW118BLK
Antibac White		DW101WHIAB DW102WHIAB	DW103WHIAB	DW104WHIAB	DW106WHIAB	DW108WHIAB	DW108VWHIAB	DW109WHIAB	DW112WHIAB	DW118WHIAB
Antibac Black		DW101BLKAB DW102BLKAB	DW103BLKAB	DW104BLKAB	DW106BLKAB	DW108BLKAB	DW108VBLKAB	DW109BLKAB	DW112BLKAB	DW118BLKAB

Pricing-Blenze plus Antibac, Hospitality & USB Charger

SKU	DESCRIPTION	MRP
SWITCH		
DW501WHIAB	6A 1WAY SWITCH - WHITE	147
DW401WHIAB	10A 1WAY SWITCH - WHITE	163
DW411WHIAB	16A 1WAY SWITCH - WHITE	240
DW413WHIAB	16A 1WAY INDICATOR SWITCH - WHITE	268
DW502WHIAB	6A 2WAY SWITCH - WHITE	187
DW224BLKAB	32A DP MODULAR SWITCH - BLACK	642
DW224WHIAB	32A DP MODULAR SWITCH - WHITE	560
DW401BLKAB	10A 1WAY SWITCH - BLACK	187
DW402BLKAB	10A 2 WAY SWITCH - BLACK	234
DW402WHIAB	10A 2 WAY SWITCH - WHITE	205
DW403BLKAB	10A 1WAY INDICATOR SWITCH - BLACK	255
DW403WHIAB	10A 1WAY INDICATOR SWITCH - WHITE	221
DW405BLKAB	10A BELL SWITCH - BLACK	243
DW405NBLKAB	10A BELL WITH INDICATOR SWITCH - BLACK	289
DW405NWHIAB	10A BELL WITH INDICATOR SWITCH - WHITE	251
DW405WHIAB	10A BELL SWITCH - WHITE	212
DW411BLKAB	16A 1WAY SWITCH - BLACK	277
DW412BLKAB	16A 2WAY SWITCH - BLACK	405
DW412WHIAB	16A 2WAY SWITCH - WHITE	332
DW413BLKAB	16A 1WAY INDICATOR SWITCH - BLACK	307
DW501BLKAB	6A 1WAY SWITCH - BLACK	160
DW502BLKAB	6A 2WAY SWITCH - BLACK	216
DW503BLKAB	6A 1WAY INDICATOR SWITCH - BLACK	245
DW503WHIAB	6A 1WAY INDICATOR SWITCH - WHITE	213
DW504NBLKAB	6A BELL PUSH SWITCH WITH INDICATOR - 2M	406
DW504NWHIAB	6A BELL PUSH SWITCH WITH INDICATOR - 2M	353
DW505BLKAB	6A BELL SWITCH - BLACK	245
DW505NBLKAB	6A BELL WITH INDICATOR SWITCH - BLACK	289
DW505NWHIAB	6A BELL WITH INDICATOR SWITCH - WHITE	251
DW505WHIAB	6A BELL SWITCH - WHITE	213
SOCKET		
DW420WHIAB	10A UNIVERSAL SOCKET - WHITE	238
DW426WHIAB	INTERNATIONAL SOCKET - WHITE	310
DW420BLKAB	10A UNIVERSAL SOCKET - BLACK	273
DW424BLKAB	10/16A SOCKET - BLACK	442
DW426BLKAB	INTERNATIONAL SOCKET - BLACK	374
DW427BLKAB	1MODULE - 2 PIN CHARGER SOCKET BLACK	212
DW427WHIAB	1MODULE - 2 PIN CHARGER SOCKET WHITE	185
DW428BLKAB	25 A SOCKET BLACK	502
DW428WHIAB	25 A SOCKET WHITE	437

SKU	DESCRIPTION	MRP
FRONT PLATES		
DW106WHIAB	6 MOD FRONT PLATE ASSEMBLY - WHITE	242
DW108WHIAB	8 MOD FRONT PLATE ASSEMBLY - WHITE	308
DW103WHIAB	3 MOD FRONT PLATE ASSEMBLY - WHITE	152
DW102WHIAB	2 MOD FRONT PLATE ASSEMBLY - WHITE	135
DW112WHIAB	12 MOD FRONT PLATE ASSEMBLY - WHITE	414
DW101WHIAB	1 MOD FRONT PLATE ASSEMBLY - WHITE	124
DW104WHIAB	4 MOD FRONT PLATE ASSEMBLY - WHITE	165
DW101BLKAB	1 MOD FRONT PLATE ASSEMBLY - BLACK	143
DW102BLKAB	2 MOD FRONT PLATE ASSEMBLY - BLACK	156
DW103BLKAB	3 MOD FRONT PLATE ASSEMBLY - BLACK	174
DW104BLKAB	4 MOD FRONT PLATE ASSEMBLY - BLACK	189
DW104BLKAB	6 MOD FRONT PLATE ASSEMBLY - BLACK	189
DW108BLKAB	8 MOD FRONT PLATE ASSEMBLY - BLACK	377
DW108VBLKAB	8 MOD FRONT PLATE ASSEMBLY SQUARE - BLK	370
DW108VWHIAB	8 MOD FRONT PLATE ASSEMBLY SQUARE - WHI	321
DW109BLKAB	9M BLENZE FRONT PLATE IN BLACK	410
DW109WHIAB	9M BLENZE FRONT PLATE IN WHITE	356
DW109WHI-AAB	9M BLENZE FP WITH 4 10A SOCKET	356
DW109WHI-BAB	9M BLENZE FP WITH 4 INTEL SOCKET	356
DW112BLKAB	12 MOD FRONT PLATE ASSEMBLY - BLACK	477
DW118BLKAB	18 MOD FRONT PLATE ASSEMBLY - BLACK	668
DW118WHIAB	18 MOD FRONT PLATE ASSEMBLY - WHI	581
HOSPITALITY		
DW901WHI	DND INDICATOR WHITE	268
DW902WHI	MMR INDICATOR WHITE	268
DW903WHI	MML INDICATOR WHITE	268
DW527WHI	ENERGY KEY TAG WITH TIME DELAY WHITE	3438
DW414WHI	2 WAY SWITCH DND MARKED WHITE	312
DW415WHI	1 WAY SWITCH MMR MARKED WHITE	289
DW416WHI	1 WAY SWITCH MML MARKED WHITE	289
DW901BLK	DND INDICATOR BLACK	277
DW902BLK	MMR INDICATOR BLACK	277
DW903BLK	MML INDICATOR BLACK	277
DW527BLK	ENERGY KEY TAG WITH TIME DELAY BLACK	3916
DW414BLK	2 WAY SWITCH DND MARKED BLACK	326
DW415BLK	1 WAY SWITCH MMR MARKED BLACK	292
DW416BLK	1 WAY SWITCH MML MARKED BLACK	292
USB CHARGER		
DW583WHI	USB CHARGER-1 MODULE	945

Honeywell Environmental and Energy Solutions

Honeywell Electrical Devices and Systems India Limited

Chennai: 3rd & 4th Floor, 57, 59, 61 & 63 Dowlath Towers, Taylors Road, Kilpauk, Chennai - 600 010, India
Tel: +91-44-66085600 **E-mail:** eccteamindia@honeywell.com; eccchennai@honeywell.com **Website:** www.honeywell.com

Honeywell Automation India Limited

Pune: Plot No. 56/57, Hadapsar Industrial Estate, Pune - 411 013, India
Tel: +91-20-66039400 **Fax:** +91-20-66039800 **E-mail:** eccpune@honeywell.com

BANGALORE

3rd Floor, Chambers @ Mantri
Municipal No. 10
Richmond Road
Bangalore - 560 025
Tel: +91-80-67124120/21/22/23
E-mail: eccbangalore@honeywell.com

BARODA

2nd Floor, Startrek
Opp. Rajlakshmi Complex
Old Padra Road, Baroda - 390 005
Tel: +91-265-6699600
Fax: +91-265-6699610
E-mail: eccbaroda@honeywell.com

COCHIN

41/2553, 2-A 2nd Floor, Metro Palace
Opp. Town Railway Station
Cochin - 682 018
Tel: +91-484-2394379/4044830
Fax: +91-484-2394732
E-mail: ecccochi@honeywell.com

GURGAON

Unitech Trade Center
5th Floor, Sector 43, Block C
Sushant Lok, Phase 1, Gurgaon - 122 022
Tel: +91-124-4975050
Fax: +91-124-6715014
E-mail: eccdelhi@honeywell.com

HYDERABAD

8-2-418, Krishnama House
3rd Floor, Road No. 7
Banjara Hills
Hyderabad - 500 034
Tel: +91-40-66030900/70
Fax: +91-40-66030971
E-mail: ecchyderabad@honeywell.com

KOLKATA

Srijan Techpark
8th Floor, DN-52
Salt Lake, Sector-V
Kolkata - 700 091
Tel: +91-33-66283693/94
Fax: +91-33-66283701
E-mail: ecckolkata@honeywell.com

MUMBAI

Eco-elite Building, 2nd Floor
Marol Maroshi Road, Marol
Next to Zakaria Industrial Estate
Andheri (E), Mumbai - 400 059
Tel: +91-22-67650680/81
Fax: +91-22-67650682
E-mail: eccmumbai@honeywell.com

Customer Care: 1800 103 3848



WhatsApp: +91 81306 91299

Honeywell

